

# PPC



## POS-6920-PPC

### The Fanless 15" True Flat Touch Panel PC

#### Features and Benefits:

- True Fanless Design with Dual-Core Atom D525
- 15" True Flat Touch Screen
- Bezel Free Front Panel
- All-in-One Slim Panel PC
- HDD Easy Maintenance Design
- Optional MSR / i-Button / Fingerprint / VFD / 2nd Display
- Optional integrated Wireless LAN / RFID
- Support CF Card Type I & II
- Wall-mountable VESA 100 x 100 Standard



**PROTECH SYSTEMS**  
*It's the right choice*

#### Protech Systems Co., Ltd.

No. 24, Lane 365, Yang Goang Street, Nei Hu District Taipei 114, Taiwan  
TEL: +886-2-8751-1111 FAX: +886-2-8751-1199  
E-mail: sales@protech.com.tw  
<http://www.protech.com.tw>

#### Protech Technologies Inc.

950 Fee Ana St, Suite B Placentia, CA 92870  
TEL: +1-714- 996-7200 FAX: +1-714- 996-7300  
Sales: sales@protech-usa.net  
<http://www.protech-usa.net>

#### Protech Japan Co., Ltd.

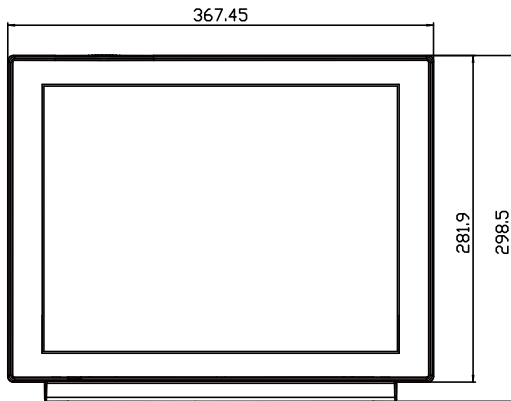
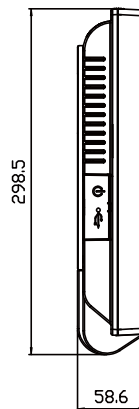

OSK Bldg, 6F, 6-25-14, Minami-ohi Shinagawa-ku, Tokyo, 140-0013  
TEL: +81-3-5753-8411 FAX: +81-3-3763-9282  
E-mail: sam@protech-j.com  
<http://www.protech-j.com>



ISO CERTIFIED  
**9001 14001**

# POS-6920-PPC

## The Fanless 15" True Flat Touch Panel PC

**Front View**

**Side View**

**IO View**


Unit: mm

**Specification**

System	
<b>CPU Support</b>	Intel® Atom™ D525 CPU
<b>Memory</b>	1 x DDR3 SO-DIMM Slot, Default 1GB (up to 4GB)
<b>Core Logic</b>	Intel® ICH8M
<b>Network</b>	10/100/1000 Base-T Fast Ethernet
<b>Power Supply</b>	72Watt power adapter
<b>System Weight</b>	5 kg
<b>Dimension (W x H x D)</b>	369 x 299 x 58.6 mm (14.53" x 11.77" x 2.31")
<b>O.S. Support</b>	POSReady2009 / POSReady7 / WINXP / WIN7

**Storage**

<b>HDD</b>	1 x 2.5" SATA HDD
<b>SSD</b>	Optional Half-Slim SSD
<b>CF</b>	Bootable Compact Flash slot for CF type I/II storages

**I/O Ports**

<b>USB</b>	4 x USB 2.0 ports / 1 x USB 2.0 on side bezel
<b>Serial Ports</b>	2 x DB-9 (COM 2/3), 1 x RJ45 (COM 1), +5V/12V selectable
<b>PS/2</b>	1 x PS/2 ports (default at keyboard)
<b>LAN</b>	1 x RJ-45
<b>VGA</b>	1 x DB-15 VGA interface
<b>Cash Drawer</b>	1 x RJ11 (+12V or +24V selectable) (default at +12V)

**Display**

<b>LCD</b>	15" TFT LCD
<b>Max. Resolution</b>	1024 x 768
<b>Brightness</b>	250 cd/m <sup>2</sup>
<b>Touch Screen</b>	True Flat 5-wire Analog resistive
<b>Tilt Angle</b>	0 ~ 60 degrees

**Environment**

<b>EMC &amp; Safety</b>	CE / FCC
<b>Operating Temp.</b>	0 ~ 35° C
<b>Storage Temp.</b>	-20 ~ 60° C
<b>Humidity</b>	20 ~ 90%

**Ordering Information**

<b>PA-6151RA-A2B</b>	POS-6920-PPC with ELO True Flat Resistive Touch, 72W Power Adaptor
<b>PA-6151RZ-23A</b>	DDR3 2G / 2.5" HDD
<b>PA-3151RZ-51B</b>	MSR, JIS-I or II, ISO Track1+2+3 (PS/2 interface)
<b>PA-6151RZ-32A</b>	ISO,14443A, Mifare® Class / UrtraLight ,Mifare® PRO, DESfire, DESfire EV1(PS/2 interface)
<b>PA-6151RZ-33B</b>	Fingerprint(USB interface)
<b>PA-6151RZ-41B</b>	Vacuum Fluorescent Display, 20 columns and 2 lines, each column is 5 x 7 dots
<b>PA-6151RZ-43B</b>	10.4" 2nd Display (800 x 600)
<b>Color</b>	Black
<b>OS</b>	POSReady2009 / POSReady7 / WINXP / WIN7

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in May 2012.